
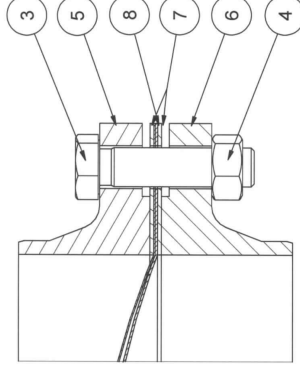


Nameplate Details	
Size : 30"	Flange Rtg: 150 ANSI
Type: HOV-SC	Bolts : 1" 1/4 Load: 46000N
Mat. : 1.4404/FEPI 4404	Torque : 245Nm
PART N° : 66228031007	Relief Area : 0.391m²
Burst Pressure	Vacuum Rating
Min: 456 MBARG @ 22° C	Full Vacuum @ 110° C
Max: 572 MBARG @ 22° C	
Est. Min: 390 MBARG @ 109° C	
Est. Max: 490 MBARG @ 109° C	

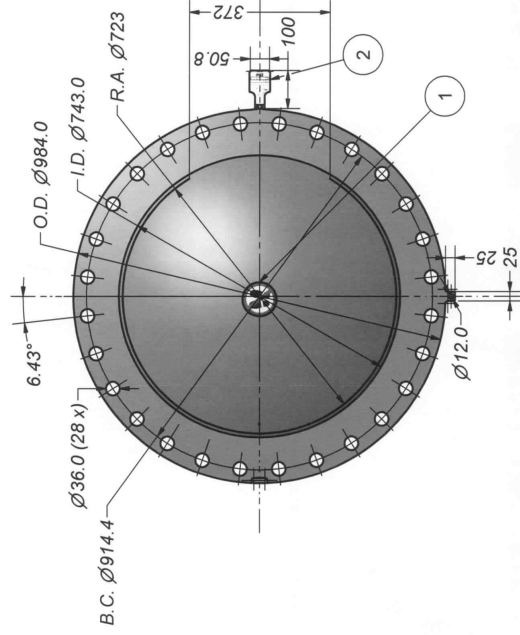

*** REMARKS ***

For processes intended to work under vacuum conditions, the use of a suitable gasket on the process-side of the pressure-relief device is critical. This gasket must have an inside diameter equal to the I.D. of the process flange.

Bursting disc outlet must vent to a safe area or an additional safeguard must be installed to insure that the pressure is vented to an area where people and/or equipment will not be further endangered.

SST nameplate is mounted at the edge of the disc for identification.

Design Code EN ISO 4126

8	24065790	1	BURSTING DISC (FOR REFERENCE)	AFM34
7		2	GASKETS	
6		1	BASE FLANGE	
5		1	HOLD DOWN FLANGE	
4		28	NUTS	
3		28	BOLTS	
2		1	NAMEPLATE BURSTING DISC	1.4301
1	88619000	1	STICKER DANGER DO NOT STAND ON DIA. 9 CM	
ITEM	PART NUMBER	QTY	DESCRIPTION	MATERIAL
This drawing contains confidential proprietary information of Fike Europe and all its subsidiaries. It is to be used for any other purpose not its contents revealed to third parties without the written consent of Fike Europe. In considering the purchase of this equipment described herein from Fike Europe, the purchaser agrees to hold Fike Europe and its subsidiaries harmless from any and all claims in other products without our written consent. It is to be retained when no longer needed. UNLESS OTHERWISE SPECIFIED: FINISH ALL OVER: ∇ TOLERANCES: ANGLE $\pm 1^\circ$ SIZES: $\pm 1mm$ DEC. X: $\pm 0.5mm$ DEC. XX: $\pm 0.15mm$ BREAK CORNER: MAX. 1mm x 45° OR 0.8mm MAX. RADIUS				
Fike EUROPE HERENTALS B 2200 BELGIUM 30" 150ANSI HOV-SC BURSTING DISC SIZE: 30" 150ANSI SCALE: 1:10 REV: - REF: 66228031009 CUST. REF: -				